

TRIAD SERIES

VS-360

**Full Port
High Pressure Ball Valve**

Triad® the ball valve for rough and tough applications...




Standard Locking
Device

Standard ISO 5211
Mounting Pad

Specifications:

- Pressure Range: 6000 psi
- Body: Carbon Steel VS360-CS
or Stainless Steel VS360-SS
- Ball/ Stem 316SS
- Seats: RPTFE with metallic insert
- Connections: NPT
- Temperature Range: -10 to 220° F
with standard seats
- Optional seats include:
Delrin
Peek
Kel-F

The new Triad VS-360 will eventually replace the popular VS-260 in sizes 1/4" to 2" in order to offer greater flexibility and ease of automation. The new series has the same design and performance features as the 260.

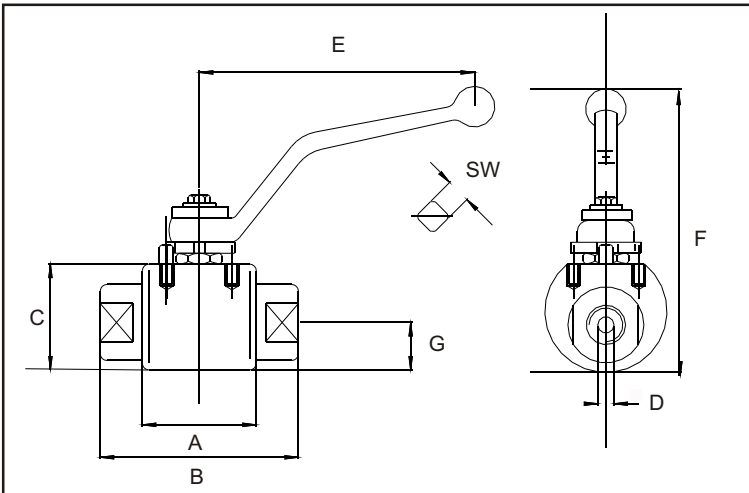

SIZE	A	B	C	D	E	F	G	SW
1/4	1.65	2.76	2.11	0.25	4.33	3.94	1.06	0.35
3/8	1.73	2.88	2.11	0.39	4.33	4.10	1.06	0.35
1/2	1.89	3.27	2.29	0.50	4.33	4.33	1.16	0.35
3/4	2.44	3.86	2.86	0.75	7.09	5.00	1.46	0.55
1	2.60	4.22	3.19	1.00	7.09	5.36	1.64	0.55
1 1/4"	3.27	5.04	3.77	1.25	7.09	5.95	1.95	0.55
1 1/2"	3.51	5.36	4.35	1.50	7.09	6.62	2.25	0.55
2	3.70	5.99	4.65	2.00	7.09	7.01	2.42	0.55



Triad®
process Equipment

4922 Technical Drive
Milford, MI 48381

www.triadprocess.com