

## Series 22D Brass Ball Valve





600 WOG - Full Port - NPT Ends

### SPECIFICATIONS:

- Two Piece Brass
- End Type: NPT
- Pressure rating: 600 WOG - 150 WSP
- Temperature: to 366°F
- Blow-out proof stem design
- ISO 5211 Top Flange for Direct Mounting
- PTFE seats with O-RING backing for low operating torque
- PTFE seals and double O-RING stem packing
- Meets the design criteria of MSS\_SP\_110

### Materials List

NO.	PART NAME	MATERIAL	NO. PCS.
1	BODY	BRASS CW 617N UNI EN 12165	1
2	END CONNECTION	BRASS CW 617N UNI EN 12165	1
3	BALL	BRASS CW 617N UNI EN 12165	1
4	BALL SEAT	PTFE	2
5	THRUST WASHER	PTFE	1
6	STEM SEAL	PTFE	1
7	O-RING	FKM	2
8	O-RING	FKM	2
9	STEM SEAL	BRASS 614 NUNI EN 12164	1

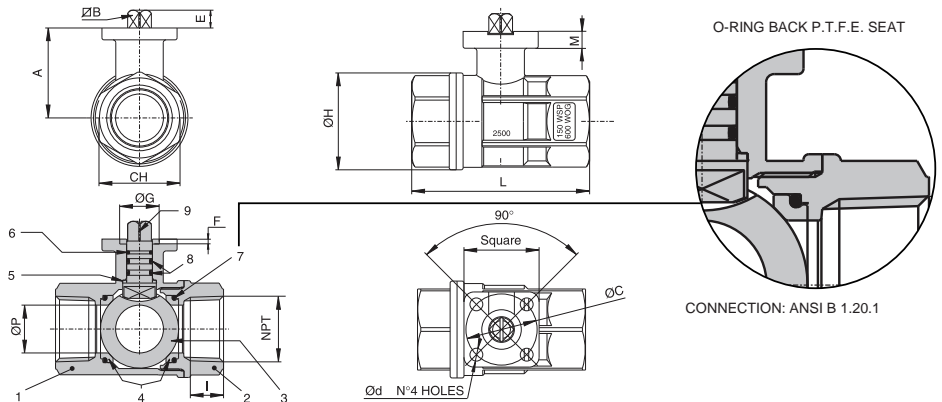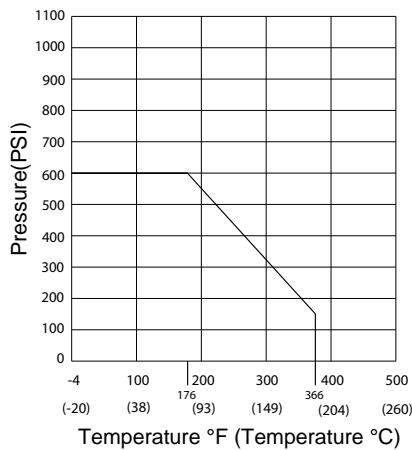

### Dimensions (in.)

SIZE	Square	A	∅B	∅C	∅d	E	F	∅G	∅H	I	L	CH	M	∅P	Weight (lbs)
3/8"	1.49	1.28	0.35	1.42 (ISO F03)	0.24	0.35	0.08	0.98	1.32	0.40	2.64	1.06	0.22	0.39	0.79
1/2"	1.49	1.28	0.35	1.42 (ISO F03)	0.24	0.35	0.08	0.98	1.32	0.53	2.64	1.06	0.22	0.56	0.66
3/4"	1.49	1.36	0.35	1.42 (ISO F03)	0.24	0.35	0.08	0.98	1.57	0.55	3.00	1.26	0.22	0.75	0.91
1"	1.49	1.79	0.35	1.42 (ISO F03)	0.24	0.35	0.12	0.98	1.93	0.66	3.35	1.61	0.24	0.95	1.55
1-1/4"	1.49	1.93	0.35	1.42 (ISO F03)	0.24	0.35	0.12	0.98	2.30	0.68	3.66	1.97	0.24	1.18	2.14
1-1/2"	1.96	2.52	0.43	1.97 (ISO F05)	0.27	0.43	0.12	1.38	2.87	0.68	4.13	2.16	0.39	1.49	3.71
2"	1.96	2.88	0.43	1.97 (ISO F05)	0.27	0.43	0.12	1.38	3.60	0.70	4.80	2.75	0.31	1.97	5.52

Copyright 2007, Triad Process Equipment. Triad and Triad Process Equipment are registered trademarks. We reserve the right to make technical and or dimensional changes without prior notice.

Triad Process Equipment<sup>®</sup>



triadvalves.com

Triad Process Equipment, Inc. 4922 Technical Drive Milford, MI 48381 248.685.9938