



INTERNATIONAL STANDARD ISO 5211

Mounting Dimensions

Flange Type	Bolt Circle (mm)	Bolt Circle (in)
F03	36	1.42
F04	42	1.65
F05	50	1.97
F07	70	2.76
F10	102	4.02
F12	125	4.92
F14	140	5.51
F16	165	6.50
F25	254	10.00
F30	298	11.73
F35	356	14.02
F40	406	15.98

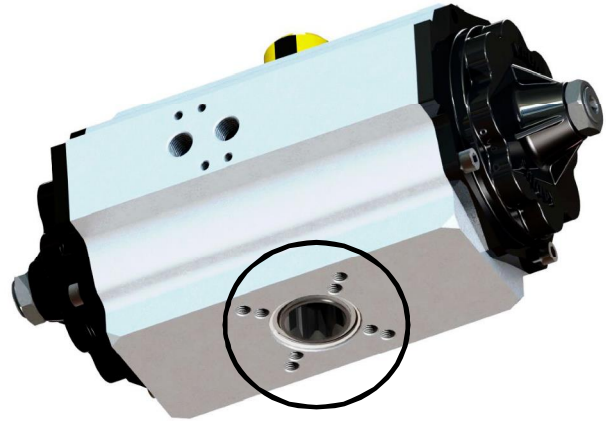

Typical Radius™ Rack & Pinion Actuator Mounting.
 Note: Depending on size, some actuators have 1 bolt hole drillings.

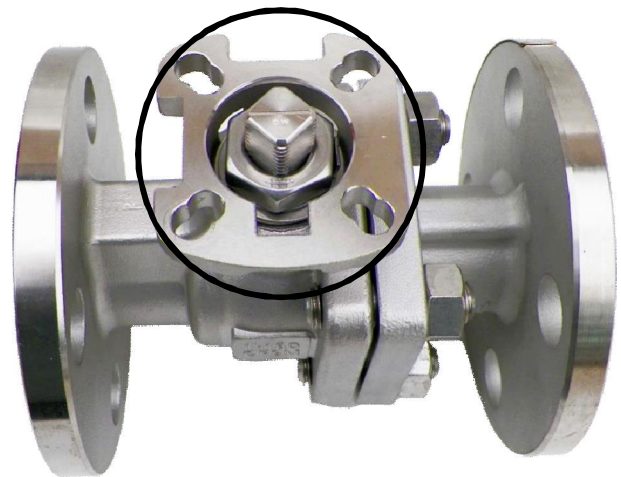

Typical Direct Mount Ball Valve
 Note: Choice of two ISO patterns